


Fabricated Abrasion Resistance

Resistance to Rub Abrasion

ASTM D6279/D5264

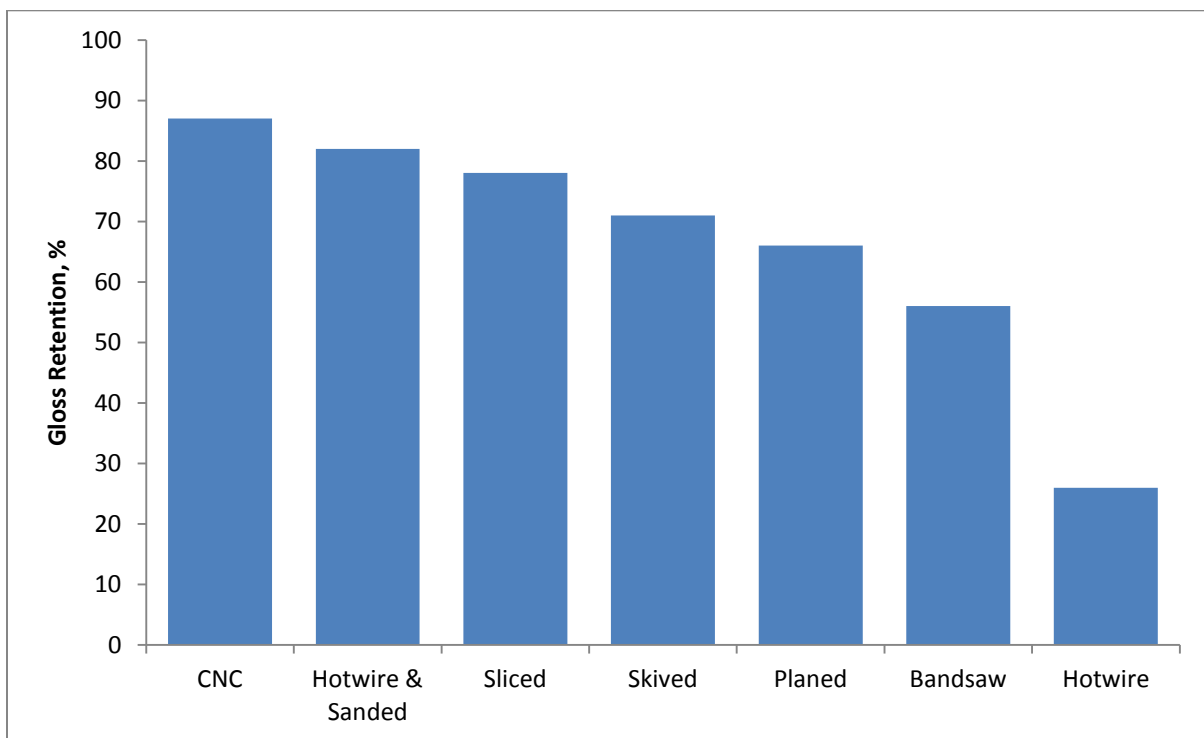

ASTM D6279: Test Method for Rub Abrasion and Mar Resistance of High Gloss Coatings.

ASTM D5264: Test Method for Abrasion Resistance of Printed Materials by the Sutherland Rub Tester.

Gloss Meter readings at 20°angle.

Abraded gloss compared to un-abraded gloss on smooth surface of ABS molded plaque.

Foam density = 1.5 pcf.

100% Gloss Retention = no change in gloss.

NOVA Chemicals® is a registered trademark of NOVA Brands Ltd.; authorized use/utilisation autorisée

ARCEL® is a registered trademark of NOVA Chemicals Inc. The ARCEL logo is a trademark of NOVA Chemicals Inc.

The information contained herein is provided for general reference purposes only. By providing the information contained herein, NOVA Chemicals Inc. makes no guaranty or warranty and does not assume any liability, with respect to the accuracy or completeness of such information, or product results in any specific instance, and hereby expressly disclaims any implied warranties of merchantability or fitness for a particular purpose or any other warranties or representations whatsoever, expressed or implied. Nothing contained herein shall be construed as a license to use the products of NOVA Chemicals.